

Bi-directional ESD / Transient Protection Diodes

FEATURES

- Transient protection for data lines to
 - IEC61000-4-2(ESD) : Air mode $\pm 30\text{kV}$ / Contact mode $\pm 30\text{kV}$
 - IEC61000-4-5(Surge) : $3\text{A}(t_p=8/20\ \mu\text{s})$
- Bi-directional working voltage up to : $V_{RWM} = 24\text{V}$
- Small Size $2.9 \times 1.6 \times 1.3\text{mm}$
- Suffix U : Qualified to AEC-Q101
ex) PG24DAS23-RTK/HU



SOT-23 (SMD-type)

PRODUCT DESCRIPTION

- Molding compound flammability rating : UL 94V-0
- Pb-Free, Halogen-Free, RoHs Compliant

Package dimensions (SOT-23)	Pin configurations (Bi-directional)																																
<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>DIM</th> <th>MILLIMETERS</th> </tr> </thead> <tbody> <tr><td>A</td><td>2.93±0.20</td></tr> <tr><td>B</td><td>1.30+0.20/-0.15</td></tr> <tr><td>C</td><td>1.30 MAX</td></tr> <tr><td>D</td><td>0.40+0.15/-0.05</td></tr> <tr><td>E</td><td>2.40+0.30/-0.20</td></tr> <tr><td>G</td><td>1.90</td></tr> <tr><td>H</td><td>0.95</td></tr> <tr><td>J</td><td>0.13+0.10/-0.05</td></tr> <tr><td>K</td><td>0.00 ~ 0.10</td></tr> <tr><td>L</td><td>0.55</td></tr> <tr><td>M</td><td>0.20 MIN</td></tr> <tr><td>N</td><td>1.00+0.20/-0.10</td></tr> <tr><td>P</td><td>7°</td></tr> </tbody> </table>	DIM	MILLIMETERS	A	2.93±0.20	B	1.30+0.20/-0.15	C	1.30 MAX	D	0.40+0.15/-0.05	E	2.40+0.30/-0.20	G	1.90	H	0.95	J	0.13+0.10/-0.05	K	0.00 ~ 0.10	L	0.55	M	0.20 MIN	N	1.00+0.20/-0.10	P	7°	<table border="1" style="margin-left: auto; margin-right: auto; margin-top: 10px;"> <thead> <tr> <th>Pin</th> <th>Identification</th> </tr> </thead> <tbody> <tr> <td>1, 2, 3</td> <td>CATHODE</td> </tr> </tbody> </table>	Pin	Identification	1, 2, 3	CATHODE
DIM	MILLIMETERS																																
A	2.93±0.20																																
B	1.30+0.20/-0.15																																
C	1.30 MAX																																
D	0.40+0.15/-0.05																																
E	2.40+0.30/-0.20																																
G	1.90																																
H	0.95																																
J	0.13+0.10/-0.05																																
K	0.00 ~ 0.10																																
L	0.55																																
M	0.20 MIN																																
N	1.00+0.20/-0.10																																
P	7°																																
Pin	Identification																																
1, 2, 3	CATHODE																																

ORDERING INFORMATION


Part Number	Qty per Reel	Reel Size	Marking code
PG24DAS23-RTK/H	3,000	7 inch	QD

PG24DAS23

MAXIMUM RATING (Ta=25)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Peak Pulse Power (tp=8/20 μs)	P _{PK}	120	W
Peak Pulse Current (tp=8/20 μs)	I _{PP}	3	A
Junction Temperature	T _J	150	
Operating Temperature	T _{opr}	-55 150	
Storage Temperature	T _{STG}	-55 150	

DEFINITIONS OF ELECTRICAL CHARACTERISTIC SYMBOL

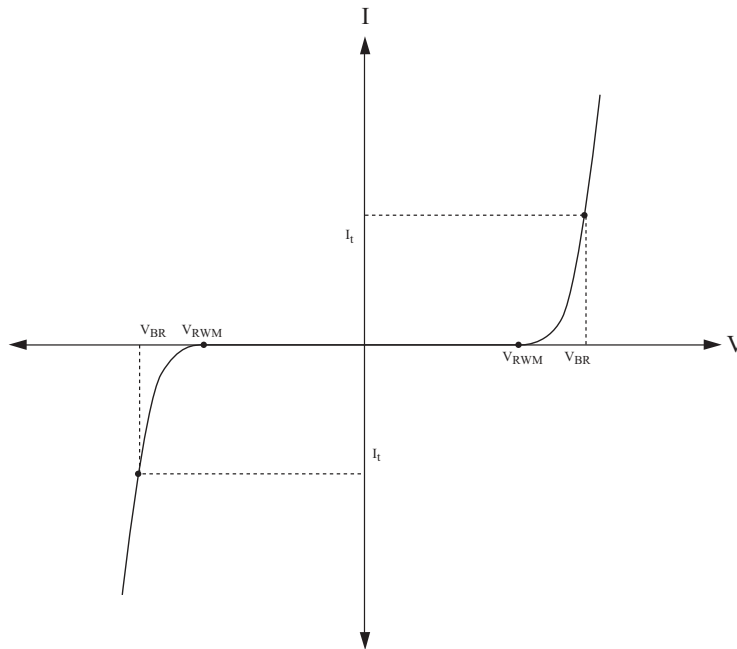


ELECTRICAL CHARACTERISTICS (Ta=25)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Reverse Stand-Off Voltage	V _{RWM}	-	-	-	24	V	
Reverse Leakage Current	I _R	V _{RWM} =24V	-	-	100	nA	
Reverse Breakdown Voltage	V _{BR}	I _t =1mA	25	-	33	V	
Total Capacitance	C _T	V _R =0V, f=1MHz (Any I/O pin to ground)	-	-	17	pF	
Clamping Voltage	V _C	I _{PP} =1A, tp=8/20 μs (IEC61000-4-5)	-	-	36	V	
		I _{PP} =3A, tp=8/20 μs (IEC61000-4-5)	-	-	40		
Electrostatic Discharge	V _{ESD}	IEC61000-4-2	Air	± 30	-	-	kV
			Contact	± 30			

PG24DAS23


NON-REPETITIVE PEAK PULSE POWER VS. PULSE TIME

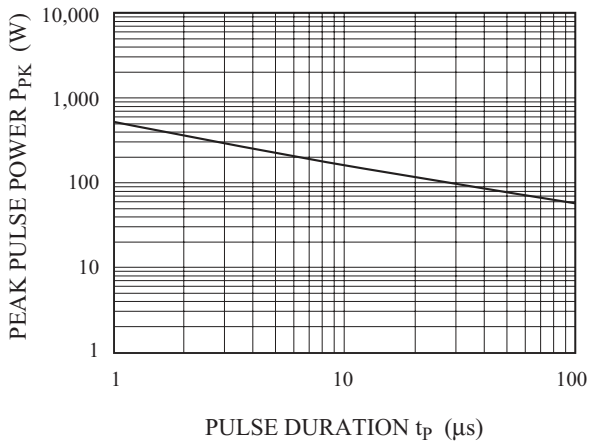


POWER DERATION CURVE

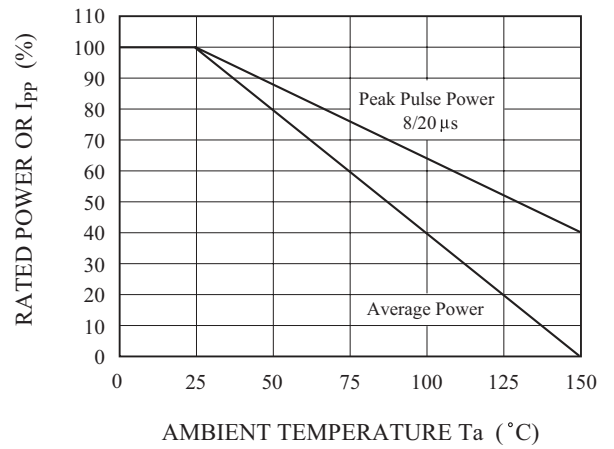


$I_R - V_{BR}$

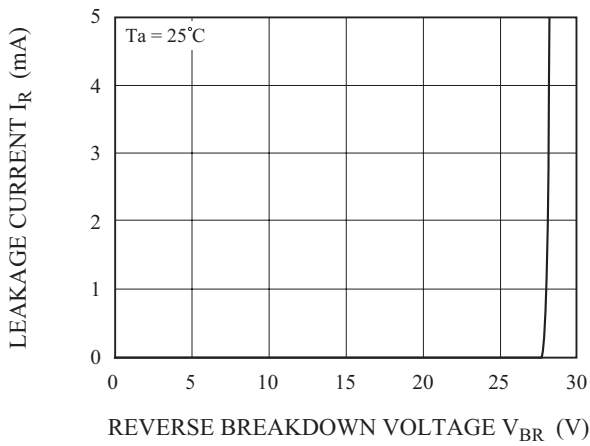


$I_R - V_R$

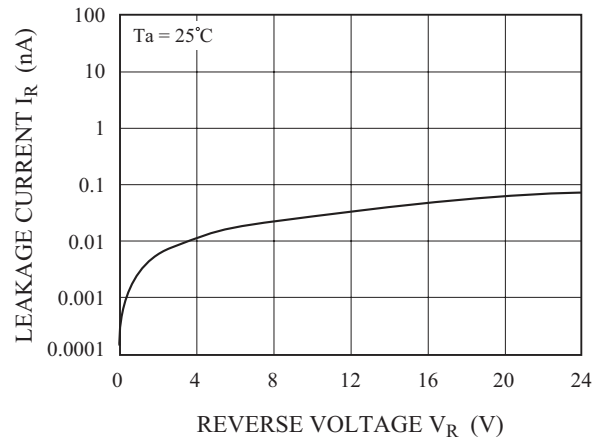


$C_T - V_R$

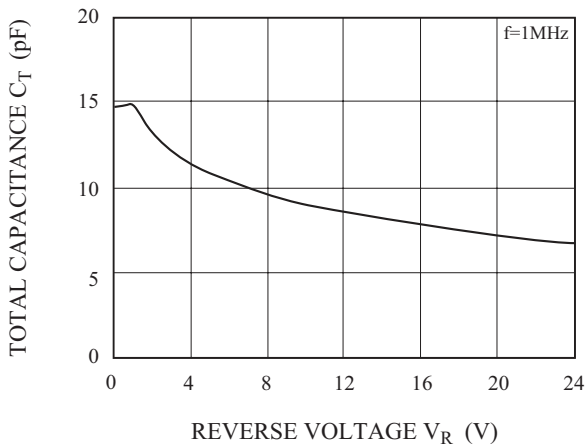

$I_{PP} - V_C$

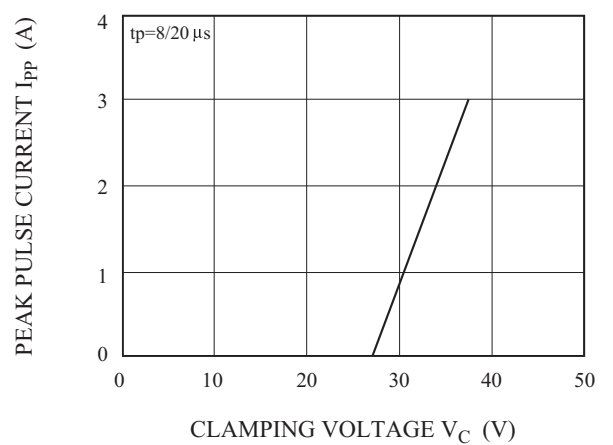

PULSE WAVEFORM

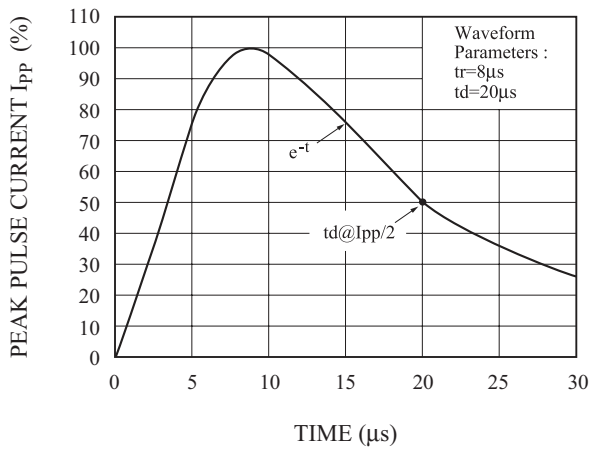

APPLICATIONS

- Low and high speed CAN
- Automotive application
- CAN-FD

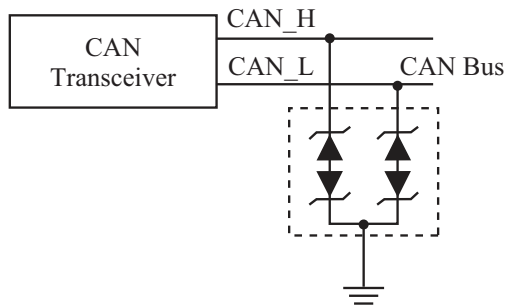


Figure 1. Low and high speed CAN, CAN-FD TVS Protection Circuit

Recommended pad dimension & Marking Information

Recommended pad dimension	Marking Code
<p>Dimensional drawing of the TVS diode package. The distance between the leads is 2.4. The width of the package is 0.8, and the height is 1.0. The distance from the center of the package to each lead is 0.95.</p>	<p>Marking diagram of the TVS diode package. The package is labeled 'QD'. A dashed box indicates the location for the Lot No. marking.</p>