

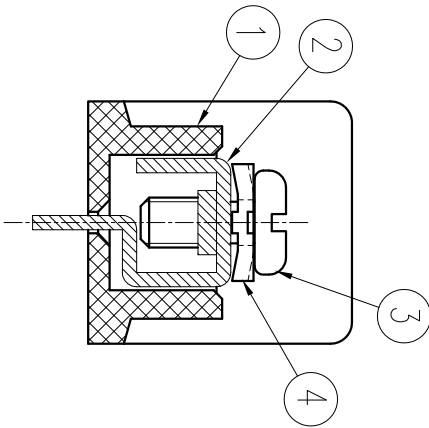

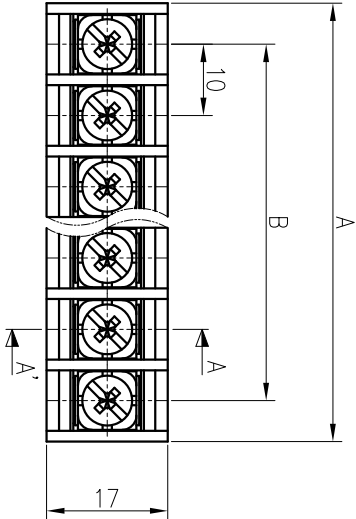


P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
At±0.8	-	21.5	31.5	41.5	51.5	61.5	71.5	81.5	91.5	101.5	111.5	121.5	131.5	141.5	151.5	161.5	171.5	181.5	191.5	201.5
B±0.5	-	10.0	20.0	30.0	40.0	50.0	60.0	70.0	80.0	90.0	100.0	110.0	120.0	130.0	140.0	150.0	160.0	170.0	180.0	190.0

COMMERCIAL TOLERANCE		
0.5 to 3	± 0.12	
over 3 to 6	± 0.16	
over 6 to 10	± 0.18	
over 10 to 18	± 0.22	
over 18 to 30	± 0.25	
over 30 to 50	± 0.3	
over 50 to 80	± 0.35	



SECTION A-A' (2:1)

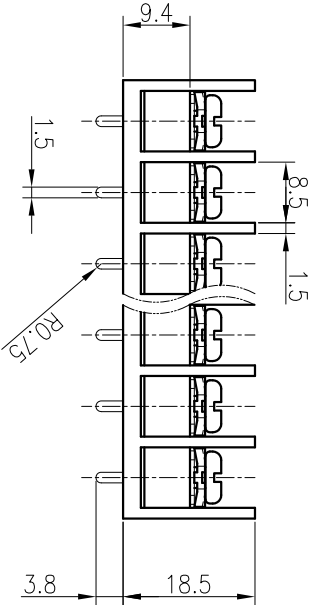

SPECIFICATION

- 1.정격 : 250V 20A
- 2.절연 저항 : DC 500V 1000MΩ 이상
- 3.내전압 : AC2000V/min
- 4.사용온도범위 : -40℃ ~ 85℃
- 5.조임 Torque 권고치 : 5kgf·cm 이내

*본 제품은 유해 물질 관리 기준치를 초과하지 않는 제품임 (RoHS Compliance)

DRAWN	CHECKED	CHECKED	APPROVED	THIRD ANGLE PROJECTION			TITLE	BR - 1000C	No.	PART No.	PART NAME	MATERIAL	Q'TY	REMARKS	FINISH
W.R.KIM				DATE.	UNIT	SCALE									
09.04.29				2009.04.29	MM	1:1									
 BEE-RYONG ELECTRONICS CO., LTD.								DWG No.	BRT - 118						



BEE-RYONG ELECTRONICS CO., LTD.